

# PRIMERITE™ CT006

## 6" X 6" AUTOMATIC DRY SELF-PRIMING TRASH PUMP



FSA AWARDED  
CONTRACT

fsheriffs.org | 850-877-2165  
cpp@fsheriffs.org



## BID AWARD FSA20-VEH18.0, HEAVY TRUCKS & EQUIPMENT SPECIFICATION #241 - 6 INCH MOBILE PUMP PACKAGE

The Primerite™ CT006 is a reliable, diesel-driven mobile water pump that can be used for anything from construction dewatering, to sewage bypass and flood drainage. The pump's oil-filled bearing box and mechanical seal in an oil bath enable it to dry-prime and re-prime up to 43 hours straight, making it the right choice for handling inconsistent flows in municipal sewage bypass pumping, storm water control and job site dewatering. This pump is a complete pump station on wheels with integral lifting bail, tie downs and 78 gal fuel tank. The FSA approved CT006 boasts max flows up to 2300 GPM, 3" solids handling and max head of 160' TDH.

### FSA APPROVED CT006 FEATURES

- 6" portable trash pump for dewatering, bypass & flood control
- EPA emission complaint Final Tier 4 diesel engine with engine driven compressor
- Heavy-duty CA-40 corrosion resistant iron, ductile cast iron ASTM A536 grade 70-50-05, 1045 and 304 stainless steel construction
- Solids handling up to 3"
- High heads up to 160' & high-volume pumping up to 2300 GPM
- Auto dry-primers and re-primers up to 43 hours at 50% load\*
- Complete pump station with integral lifting bail, tie downs and 78 gal fuel tank with gauge
- Manufactured in the USA in an ISO9001:2015 certified facility


### FSA BID AWARD ADD/DELETE OPTIONS

- Downgrade to 4" pump models
- Upgrade to 6" and 8" pump models
- Upgrade to Silent Partner™ sound attenuation enclosure for residential communities with 67 dBA at 7M / 23'
- Upgrade to skid mounted trailer
- Upgrade/Downgrade to alternate engine options including John Deere, Deutz or Yanmar
- Upgrade fuel tank capacity for longer run-time
- Additional layflat and blackwater hose with fittings
- Additional two float assembly, camlock sets, and bauer sets

### QUICK SPECIFICATIONS

Suction / delivery connection	6" 150# ANSI B16.5
Max capacity	2300 GPM
Max solids handling	3.0"
Max head (TDH)	160'
Max operating speed	2000 RPM
Max suction lift	25'
Dimensions	65 x 93 x 132"
Sound levels w/ enclosure	67 dBA at 7M / 23'
Max fuel consumption	At 67 HP; up to 43 hr run time*

Model as defined by the  
Florida Sheriff's Association

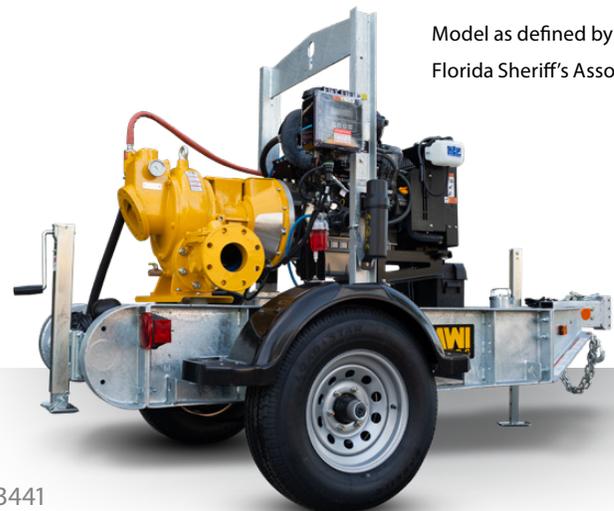

FSA APPROVED PRIMERITE™ CT006

MWI Pumps Headquarters | 33 NW 2nd Street | Deerfield Beach, FL 33441

Copyright © 2020 MWI Pumps | All rights reserved. Subject to change without notice.

Inquiries: 954-426-1500 | Fax: 954-426-8938 | Email: info@mwipumps.com | [mwipumps.com](http://mwipumps.com)