


PUMP BOWL PERFORMANCE CURVE	
TYPE: AXIAL FLOW	PROPELLER DIA: 84"
MODEL NO: NC384P0	SPEED: As Noted
INTAKE DIA: 126"	DISCHARGE COLUMN DIA: 84"
CURVE NO.: VS384P0A	Ns: 9600      CODE: 0.50
SINGLE STAGE PERFORMANCE	
FOR TWO STAGES MULTIPLY HEAD AND HORSEPOWER BY 2.0 AND EFFICIENCY BY 1.0	
PERFORMANCE IS BASED ON PUMPING CLEAR, NON-AERATED WATER, WITH A SPECIFIC GRAVITY OF 1.0, TEMPERATURE 85 °F OR LESS AND AT SEA LEVEL. PUMP PERFORMANCE MAY BE AFFECTED BY HIGHER TEMPERATURES, SPECIFIC GRAVITY, ALTITUDES AND SUMP CONDITIONS	

IT IS HEREBY CERTIFIED THAT THIS CURVE REPRESENTS THE TRUE PERFORMANCE CHARACTERISTICS OF THE MWI PUMP MODEL SHOWN AND WAS OBTAINED BY SCALE MODEL TEST AND CALCULATIONS IN ACCORDANCE WITH STANDARDS OF THE HYDRAULIC INSTITUTE.

MWI CORPORATION  
CERTIFIED BY

MWI CORPORATION  
Deerfield Beach, Florida

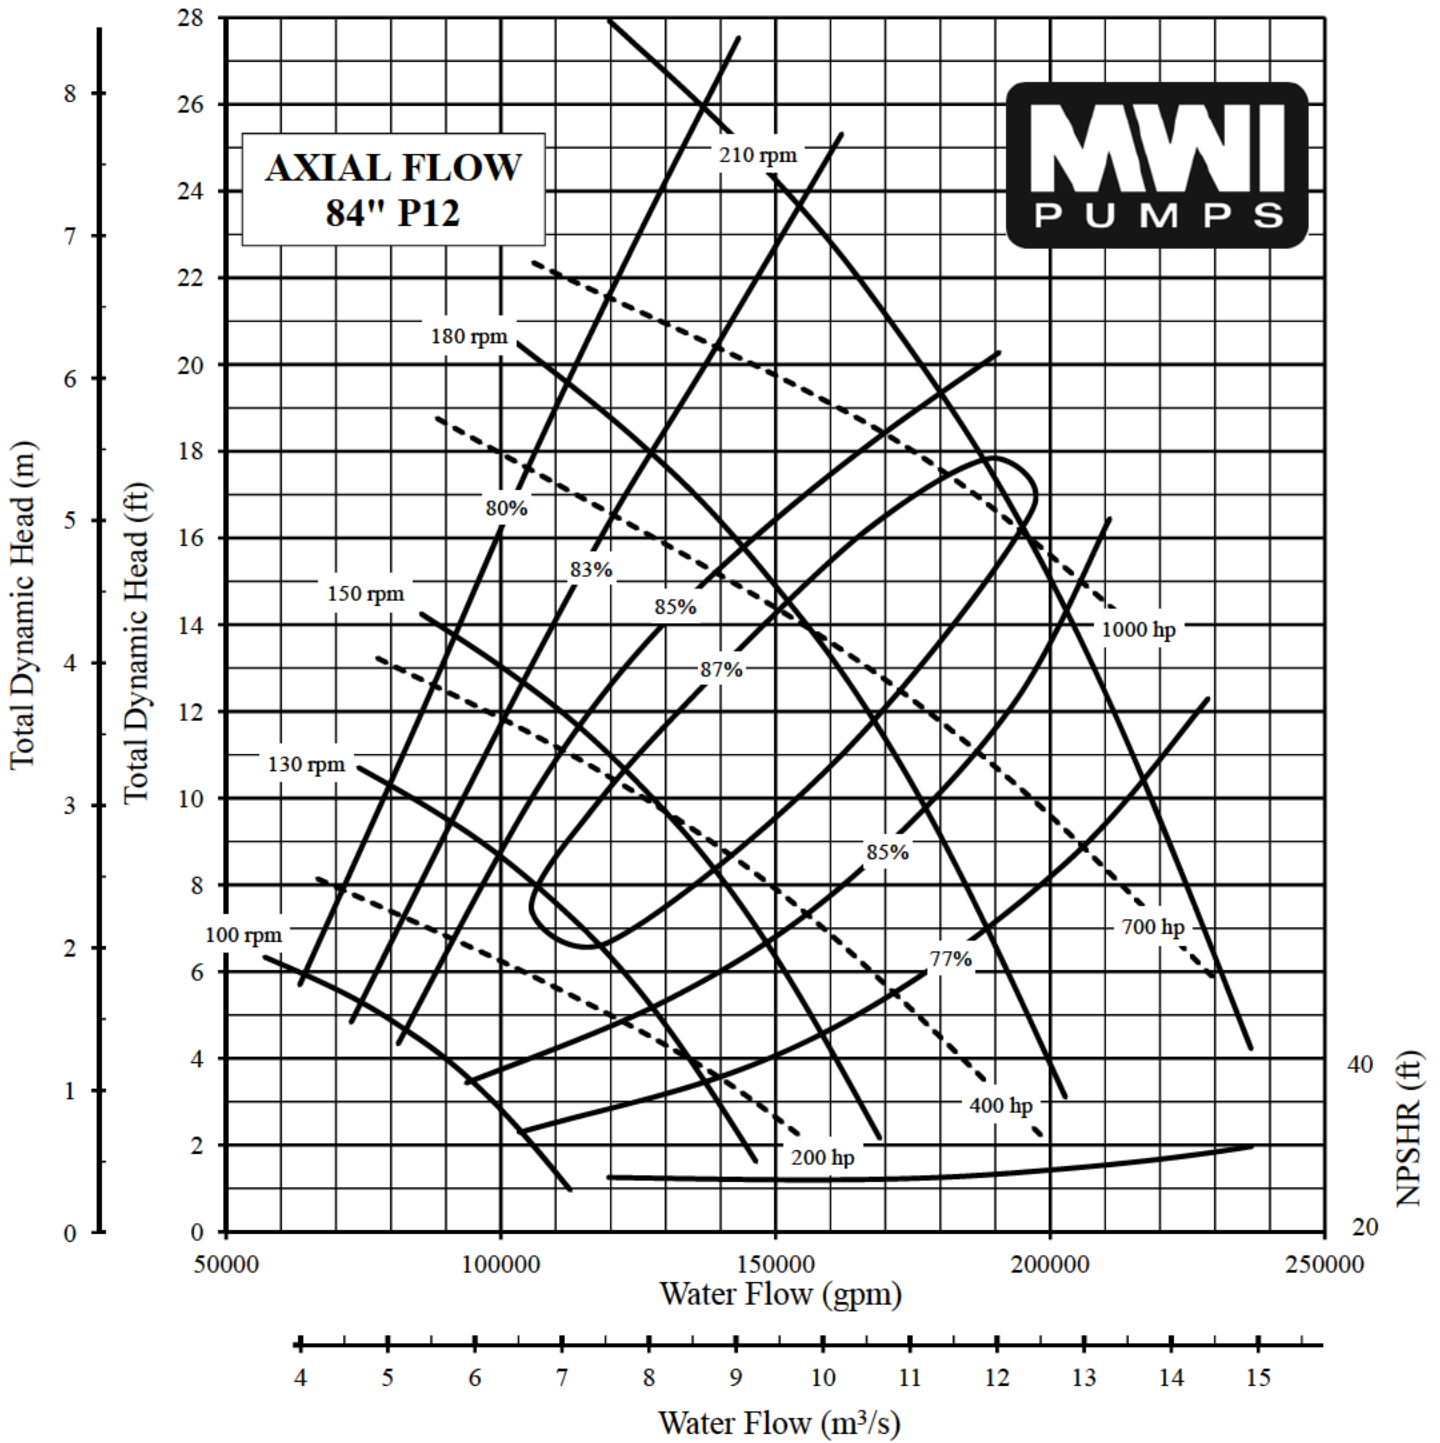


### PUMP BOWL PERFORMANCE CURVE

TYPE: AXIAL FLOW	PROPELLER DIA: 84"
MODEL NO: NC384P12	SPEED: As Noted
INTAKE DIA: 126"	DISCHARGE COLUMN DIA: 84"
CURVE NO.: VS384P12A	Ns: 10200    CODE: 0.50

SINGLE STAGE PERFORMANCE  
 FOR TWO STAGES MULTIPLY HEAD AND HORSEPOWER BY 2.0 AND EFFICIENCY BY 1.0  
 PERFORMANCE IS BASED ON PUMPING CLEAR, NON-AERATED WATER, WITH A SPECIFIC GRAVITY OF 1.0, TEMPERATURE 85 °F OR LESS AND AT SEA LEVEL. PUMP PERFORMANCE MAY BE AFFECTED BY HIGHER TEMPERATURES, SPECIFIC GRAVITY, ALTITUDES AND SUMP CONDITIONS

IT IS HEREBY CERTIFIED THAT THIS CURVE REPRESENTS THE TRUE PERFORMANCE CHARACTERISTICS OF THE MWI PUMP MODEL SHOWN AND WAS OBTAINED BY SCALE MODEL TEST AND CALCULATIONS IN ACCORDANCE WITH STANDARDS OF THE HYDRAULIC INSTITUTE.



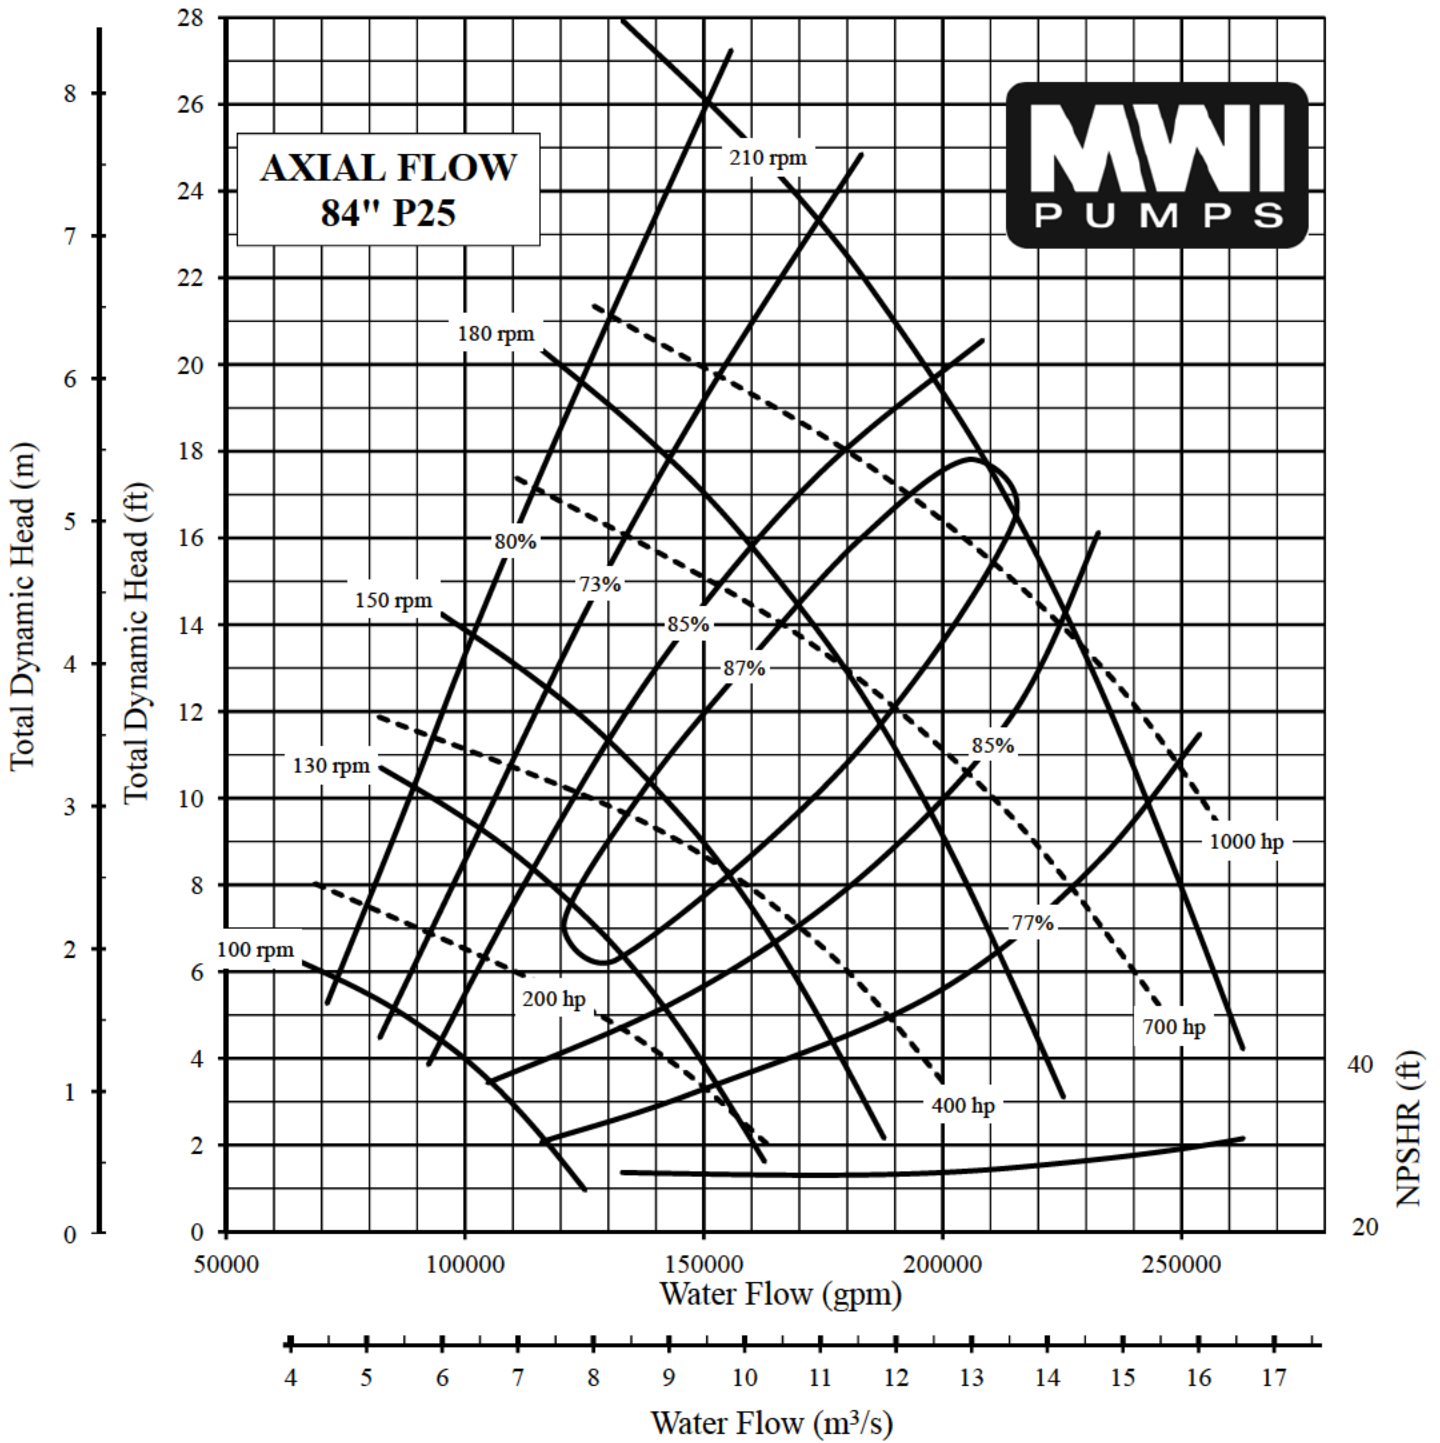


### PUMP BOWL PERFORMANCE CURVE

TYPE: AXIAL FLOW	PROPELLER DIA: 84"
MODEL NO: NC384P25	SPEED: As Noted
INTAKE DIA: 126"	DISCHARGE COLUMN DIA: 84"
CURVE NO.: VS384P25A	Ns: 10900    CODE: 0.50

SINGLE STAGE PERFORMANCE  
 FOR TWO STAGES MULTIPLY HEAD AND HORSEPOWER BY 2.0 AND EFFICIENCY BY 1.0  
 PERFORMANCE IS BASED ON PUMPING CLEAR, NON-AERATED WATER, WITH A SPECIFIC GRAVITY OF 1.0, TEMPERATURE 85 °F OR LESS AND AT SEA LEVEL. PUMP PERFORMANCE MAY BE AFFECTED BY HIGHER TEMPERATURES, SPECIFIC GRAVITY, ALTITUDES AND SUMP CONDITIONS

IT IS HEREBY CERTIFIED THAT THIS CURVE REPRESENTS THE TRUE PERFORMANCE CHARACTERISTICS OF THE MWI PUMP MODEL SHOWN AND WAS OBTAINED BY SCALE MODEL TEST AND CALCULATIONS IN ACCORDANCE WITH STANDARDS OF THE HYDRAULIC INSTITUTE.



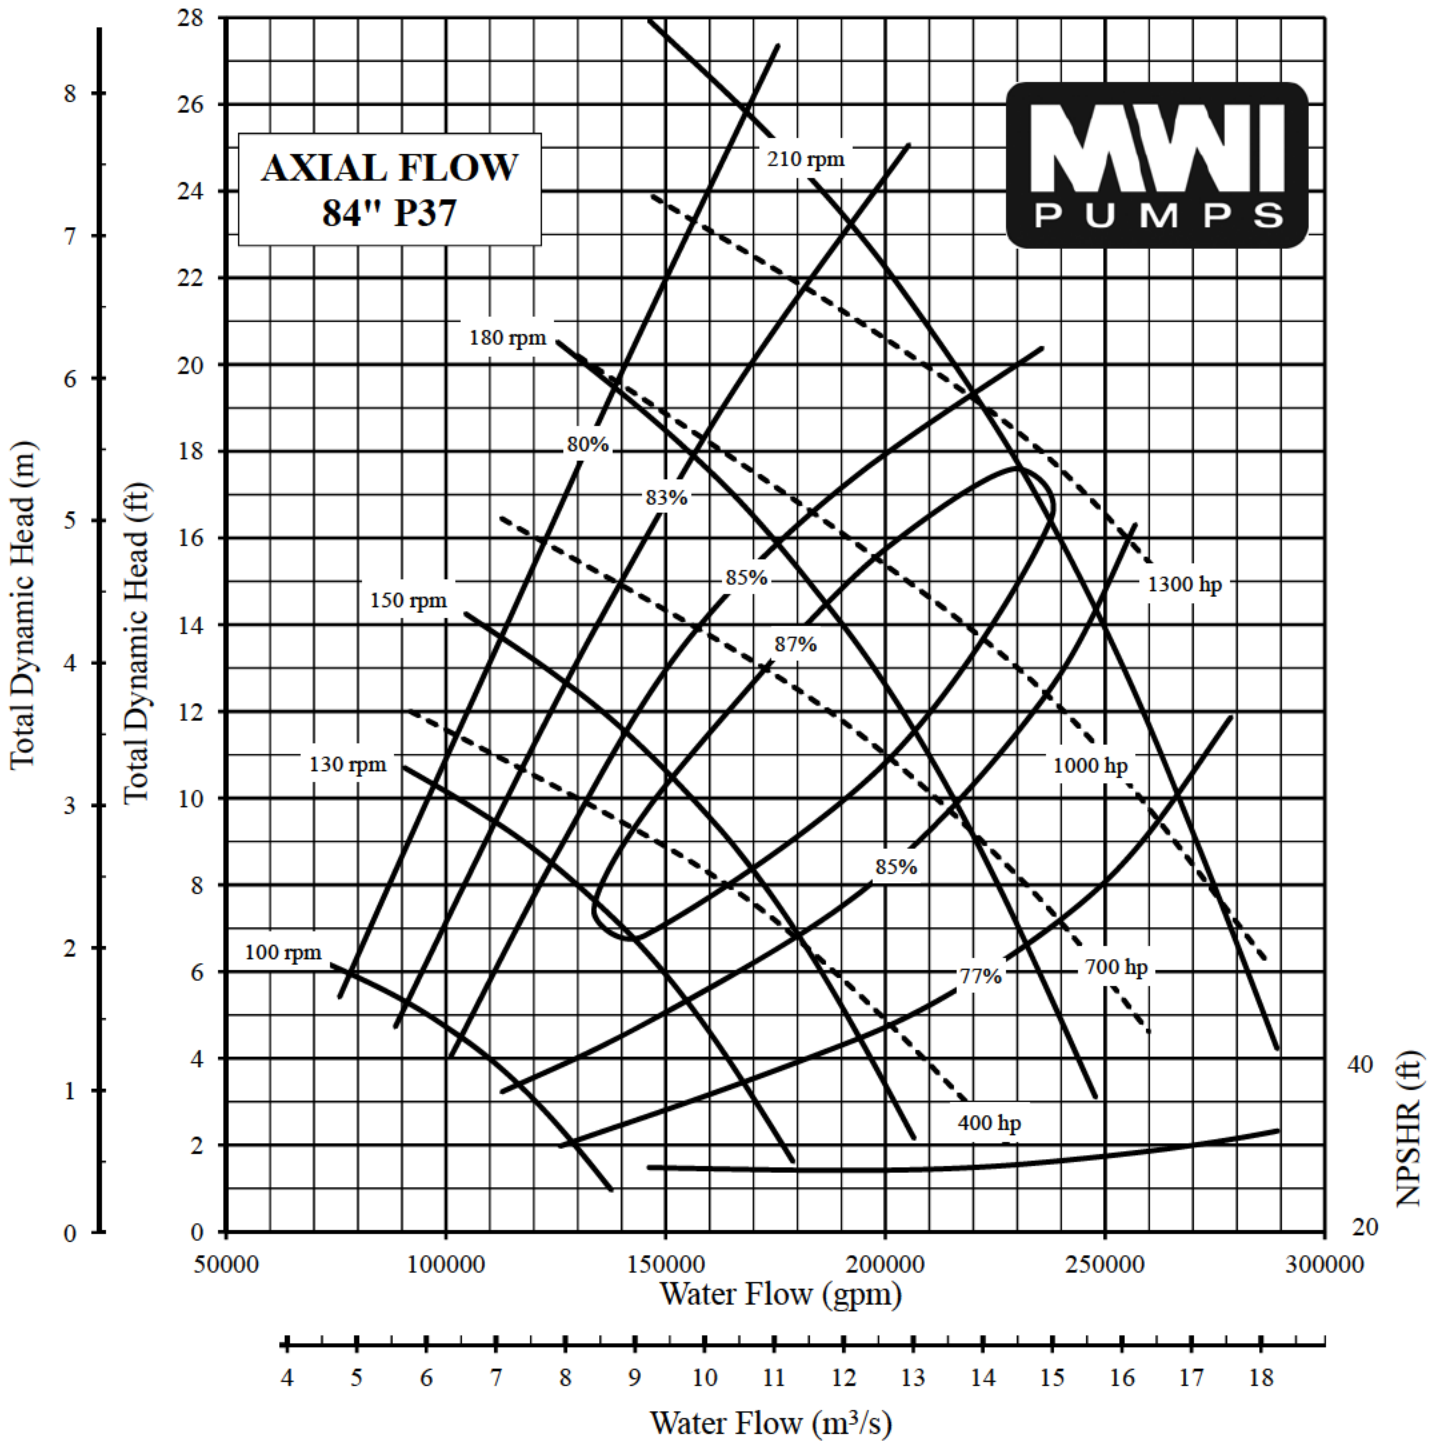

### PUMP BOWL PERFORMANCE CURVE

TYPE: AXIAL FLOW	PROPELLER DIA: 84"
MODEL NO: NC384P37	SPEED: As Noted
INTAKE DIA: 126"	DISCHARGE COLUMN DIA: 84"
CURVE NO.: VS384P37A	Ns: 11300 CODE: 0.50

SINGLE STAGE PERFORMANCE  
 FOR TWO STAGES MULTIPLY HEAD AND HORSEPOWER BY 2.0 AND EFFICIENCY BY 1.0  
 PERFORMANCE IS BASED ON PUMPING CLEAR, NON-AERATED WATER, WITH A SPECIFIC GRAVITY OF 1.0, TEMPERATURE 85 °F OR LESS AND AT SEA LEVEL. PUMP PERFORMANCE MAY BE AFFECTED BY HIGHER TEMPERATURES, SPECIFIC GRAVITY, ALTITUDES AND SUMP CONDITIONS

IT IS HEREBY CERTIFIED THAT THIS CURVE REPRESENTS THE TRUE PERFORMANCE CHARACTERISTICS OF THE MWI PUMP MODEL SHOWN AND WAS OBTAINED BY SCALE MODEL TEST AND CALCULATIONS IN ACCORDANCE WITH STANDARDS OF THE HYDRAULIC INSTITUTE.

MWI CORPORATION  
 CERTIFIED BY

MWI CORPORATION  
 Deerfield Beach, Florida